

T-Cap & Reducer Installation



The information within this guide is for reference only and does not supersede instruction from other manufacturers or building codes. Wear all required safety equipment to prevent personal injury during installation of this product. Always consult and follow manufacturers specific installation and safety instructions BEFORE installing any products. Boden Flooring bears no responsibility or liability for damage(s) resulting from the contents contained within this manual. All tasks performed by the product user are at the own risk and liability of the user. Information may change without notice. Visit www.bodenflooring.com for most current revision.

Required Products (included):



Boden Color Matched
Reducer



Boden Color Matched
T profile



Plastic track



shim strip

Required Materials:



LePage® PL® Premium FastGrab

or



Wood Screws / Finishing Nails

Required tools:



Tape Measure



Marker / Pencil

Appropriate
Cutting Blade




Rubber Mallet

Installation:



Allow an appropriate sized free space between the two floorings where they meet.
Ensure to allow additional free space for each flooring to expand / contract / float, depending on flooring requirements.

b) optional

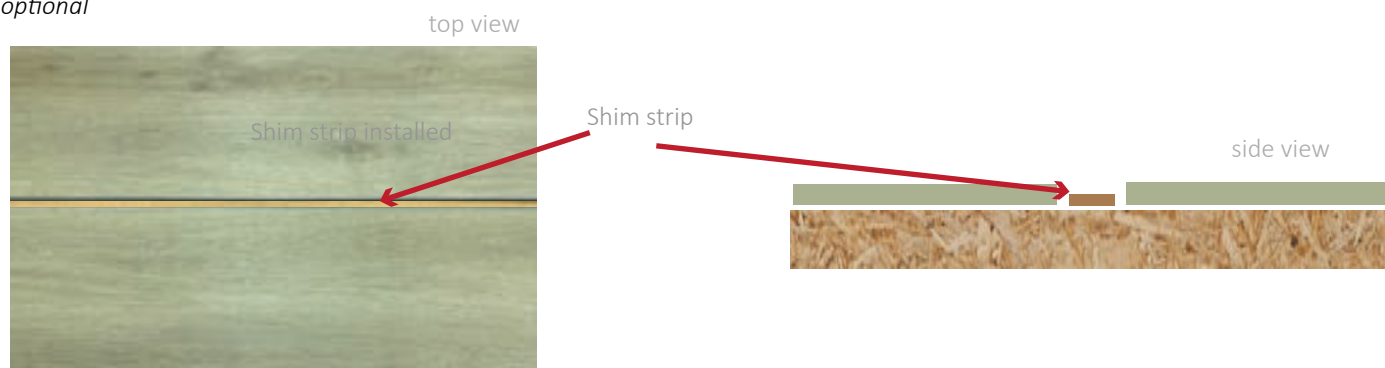


Depending on the height difference between the floorings, a **shim strip** may be required.

The available **shim strips** are +- 4mm thick.

Consequently if you require a different shim thickness, cut one from a suitable wood backing to fit or combine multiple shim strips.

On wood subfloors, use screws or finishing nails to fasten the shim.

On concrete subfloors, use LePage® PL® Premium to fasten the shim. Allow to cure.

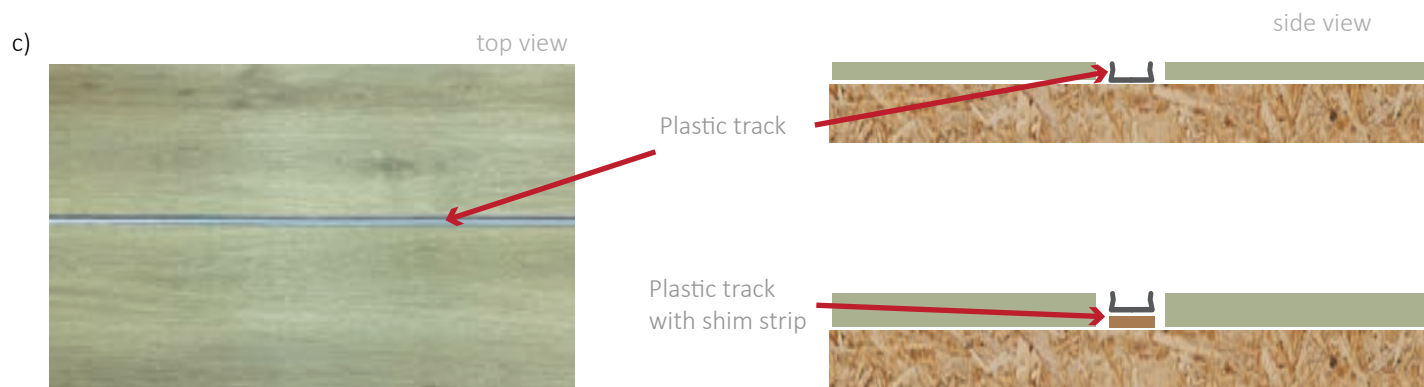


Fasten the plastic track.

To fasten plastic track to wood, use screws.

To fasten to concrete, use PL premium adhesive. Allow to cure.

Installation continued:


d i) "T" profile assembly

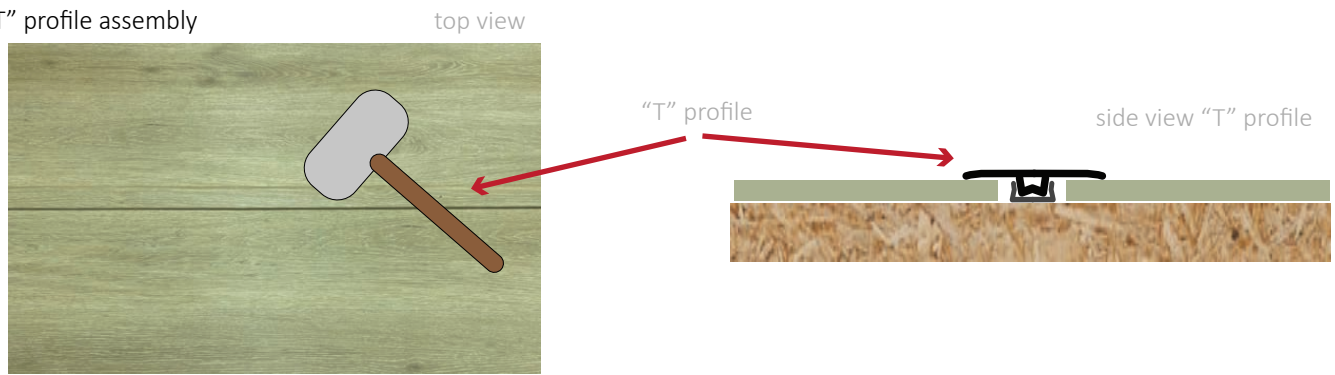

When both floorings are the same finished height, use a T profile.

To install the T profile, set the Boden T-cap onto the plastic track, then use a rubber mallet to gently tap the profile to seat it into the plastic track. Start on one end, moving down the length of the profile until the entire profile has been seated into the plastic track.

d ii) "T" reducer assembly

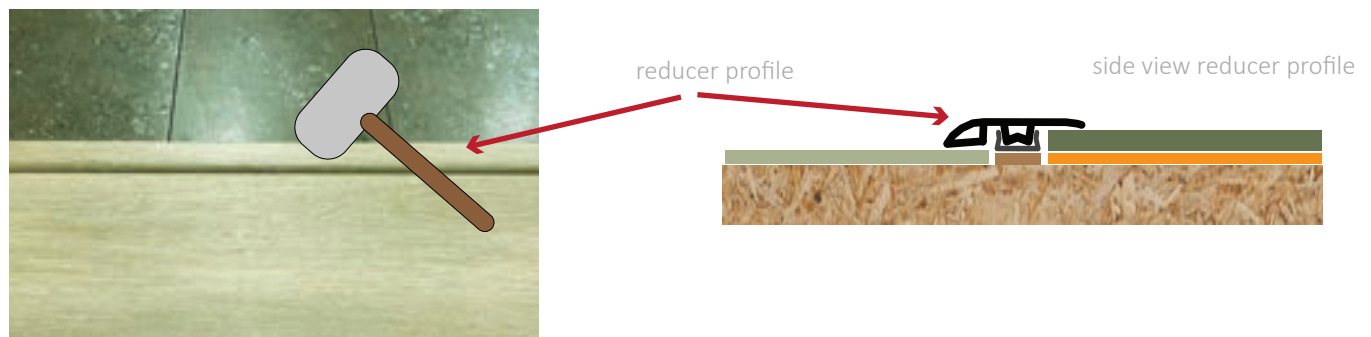

When both floorings have different finished heights, use a reducer profile.

To install the reducer profile, set the Boden reducer onto the plastic track, then use a rubber mallet to gently tap the profile to seat it into the plastic track. Start on one end, moving down the length of the profile until the entire profile has been seated into the plastic track.

Cautions;

- Do not use excessive force or you will damage the parts
- Ensure the male receptor of the profile is aligned with the female receptor of the plastic track before seating together
- When either side of the profile is meeting carpet, a "carpet tap down trim" must be installed on the exposed carpet edge prior to installing the profile to provide a support for the profile
- Masking tape can be used to hold the profile in place while the LePage® PL® Premium FastGrab cures
- Predrill holes in the plastic track before installing screws to prevent it from splitting
- Silicone can be used to caulk against the finished edge where the profile meets a hard surface flooring, however this is not advised on floating floors as it will limit their ability to "float"